


# 3 GHz Gold Plated F-Type Female-to-Female Module

## PRODUCT SPECIFICATION

### Package includes:

A. 3 GHz Gold Plated F-Type Module, 1 pc

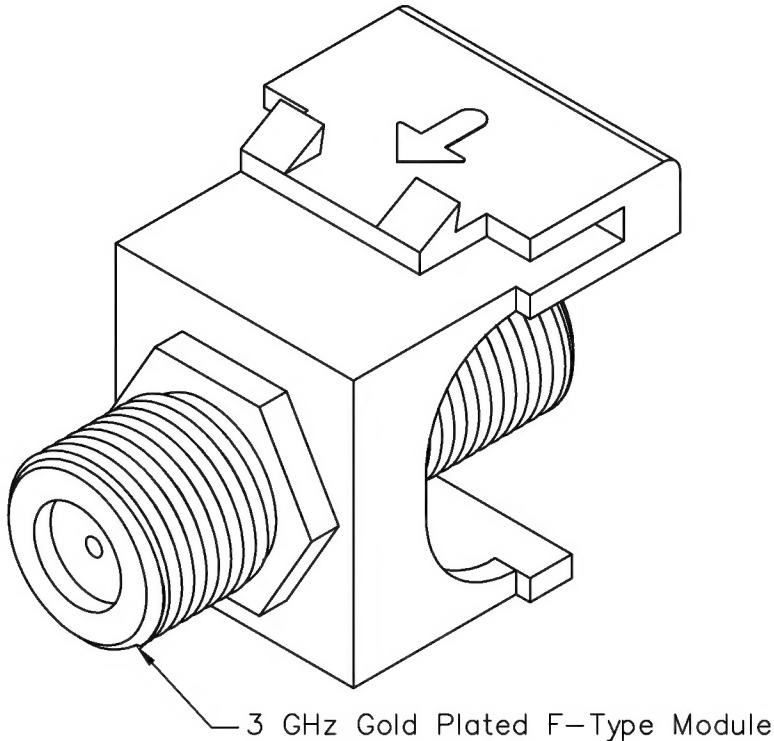

### Features and Benefits:


- Gold plating for improved performance with superior signal quality with minimal noise
- Designed with 3 GHz bandwidth for audio and video applications
- Rear threaded F-Type connectors for secure in-wall connections with both RG6 and RG59 coaxial cables
- Provides a clean and neat appearance installation
- Compatible with all IC107 faceplates, inserts, surface mount boxes, and blank patch panels
- Compatible with all IC108 furniture faceplates, bezels, and surface mount boxes
- Available in almond, black, ivory, and white
- ANSI/TIA-568-C and UL 1863 compliant

### MODULE, F-TYPE, GOLD PLATED, 3 GHZ

ITEM NO.	IC107B9GXX	REV. C
DWG NO.	PS107B9G00	PAGE NO. 1



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 \* www.icc.com

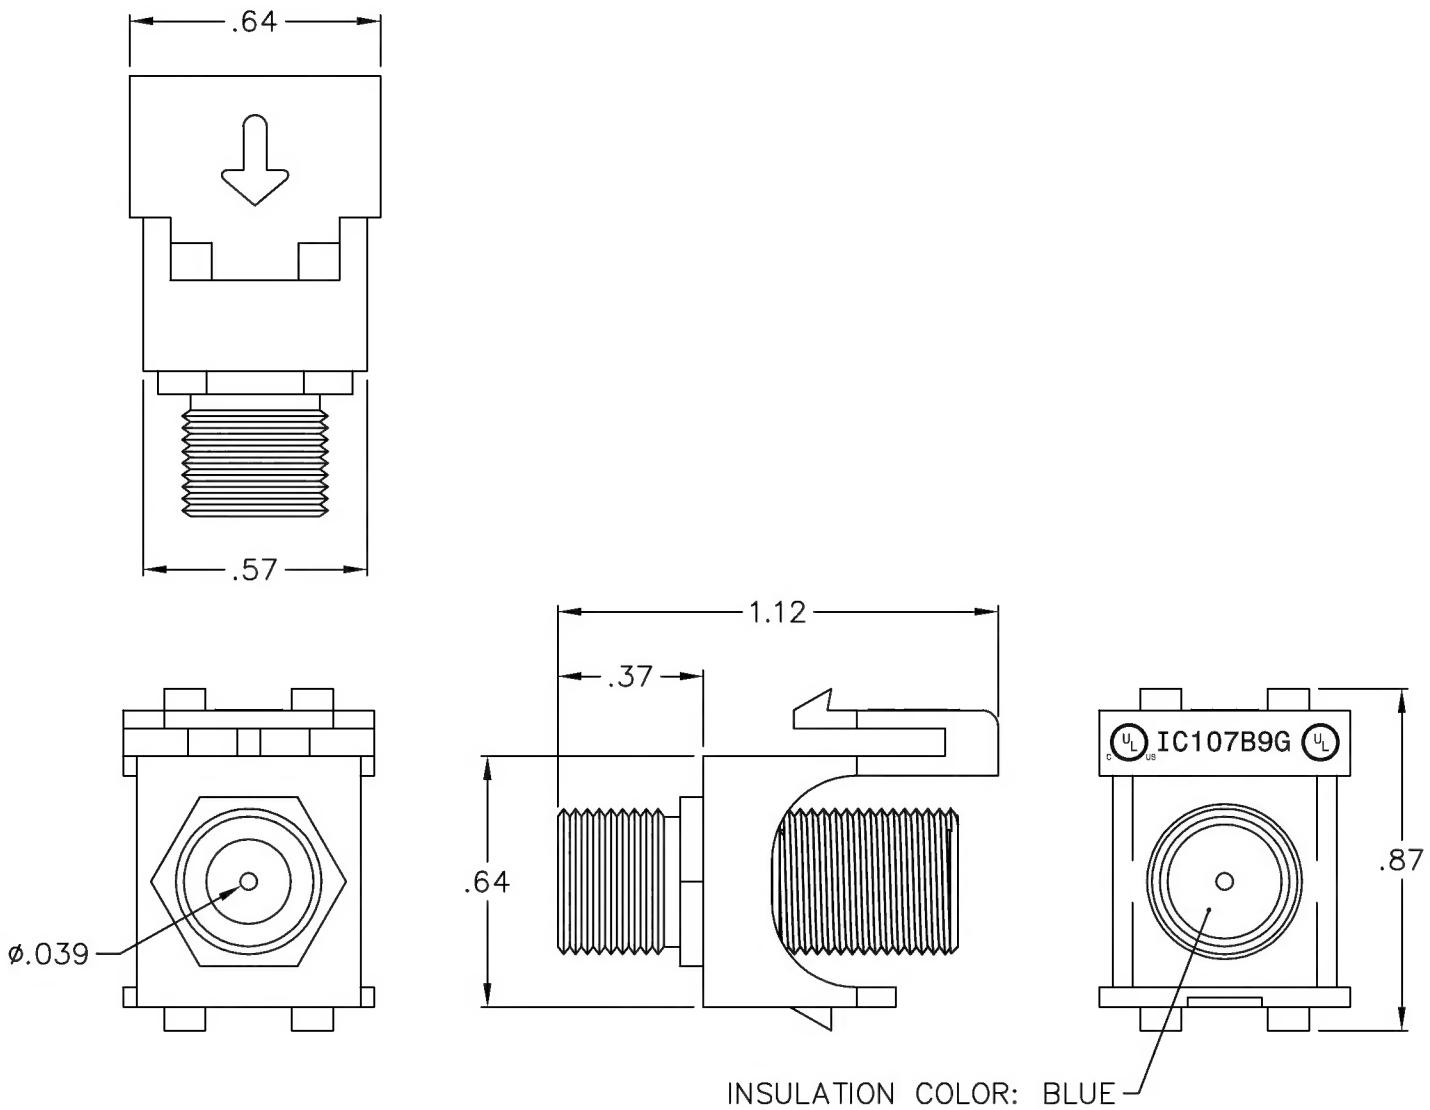

**NOTE: UNLESS OTHERWISE SPECIFIED**

1. HOUSING:
  - A. MATERIAL: ABS, UL 94V-0
  - B. COLOR: XX: AL-ALMOND, BK-BLACK, IV-IVORY, & WH-WHITE
2. GOLD PLATED F-TYPE CONNECTOR:
  - A. MATERIAL: BRONZE WITH 3 MICRON GOLD PLATING
  - B. HOLDING FORCE > 80 GRAMS
  - C. F-TYPE CONNECTOR THREADS: 3/8-32 UNEF-2A
3. ELECTRICAL:
  - A. RETURN LOSS OF -20 dB MAX
  - B. FREQUENCY RANGE 1.4 ~ 3.0 GHZ
  - C. CONTACT RESISTANCE < 10 MOHM
  - D. INSULATION RESISTANCE > 5000 MOHM
  - E. INSERTION LOSS < 0.3 dB

 UL US FILE NO. 125268

**MODULE, F-TYPE, GOLD PLATED, 3 GHZ**

ITEM NO.	IC107B9GXX	REV. C
DWG NO.	PS107B9G00	PAGE NO. 2

  
**ICC**  
*Premium Products*  
*Proven Performance*  
*Competitive Prices*

CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 \* www.icc.com